


# Clic Omega suspension SOA 10-60

**Description:** Omega-type bracket support for ceiling installations using threaded rods (ref. VR & TVR).

This support allows high loads thanks to the geometry of its section.

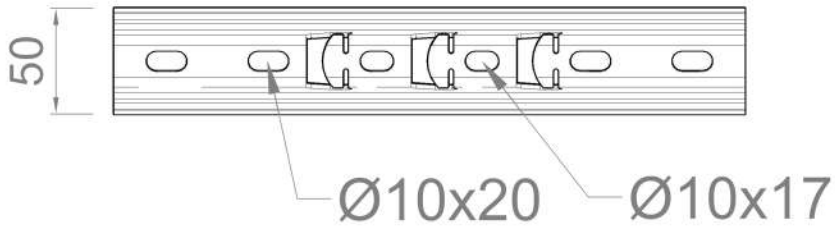

| Ref. Code | L (mm) | Thickness (mm) | Weight (Kg/unit) |
|-----------|--------|----------------|------------------|
| SOA10SG   | 250    | 2              | 0,211            |
| SOA15SG   | 300    | 2              | 0,251            |
| SOA20SG   | 350    | 2              | 0,386            |
| SOA30SG   | 450    | 2              | 0,496            |
| SOA40SG   | 550    | 2              | 0,632            |
| SOA50SG   | 650    | 2              | 0,713            |
| SOA60SG   | 750    | 2              | 0,822            |

**Suffix Code**

**Description of Coating / Material**

- SG** Sendzimir Galvanized, also called Pre-Galvanized.  
Corrosion Resistance: Classified 3 according to IEC 61537.
- IN** Austenitic Stainless Steel AISI 304 or AISI 316L.  
Corrosion Resistance: Classified 9D according to IEC 61537.

\* Ask us for other available coatings

