


# Clic omega support straight SOAL 1-3

**Description:** Long omega type support. Available in 3 lengths: 1, 2 and 3 meters. It allows multiple installation options and combinations in a quick an easy way.

**Wall installation:** Once fixed to the wall using screws, this bracket allows several EASYCONNECT® cable trays of different widths to be installed on the same plane and at different heights.

**Ceiling installation:** Fixed to ceiling using threaded rods (ref. VR & TVR), it allows to install several EASYCONNECT® cable trays of different widths, depending on the anchoring points and the desired distance between trays.

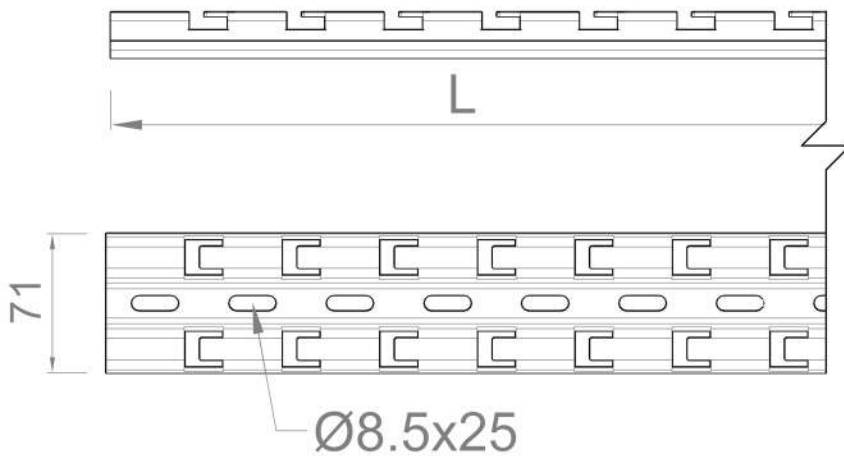

Ref. Code	L (mm)	Thickness (mm)	Weight (Kg/unit)
SOAL1SG	1000	2	1,513
SOAL2SG	2000	2	3,027
SOAL3SG	2990	2	4,540

Suffix Code

Description of Coating / Material

SG

Sendzimir Galvanized, also called Pre-Galvanized. Corrosion Resistance: Classified 3 according to IEC 61537.

IN

Austenitic Stainless Steel AISI 304 or AISI 316L. Corrosion Resistance: Classified 9D according to IEC 61537.

