


Clic omega support for ceiling SOPC 10-30

Description: Omega-type bracket for wall or ceiling. In the case of fastening this bracket to a wall, it is recommended to use the Omega bracket stop (ref. ENT) to facilitate screwing and strengthen the fixation.

The bracket can also be fixed to the ceiling using a threaded rod (ref. VR & TVR), inserting it into the hole located at the end of the support.

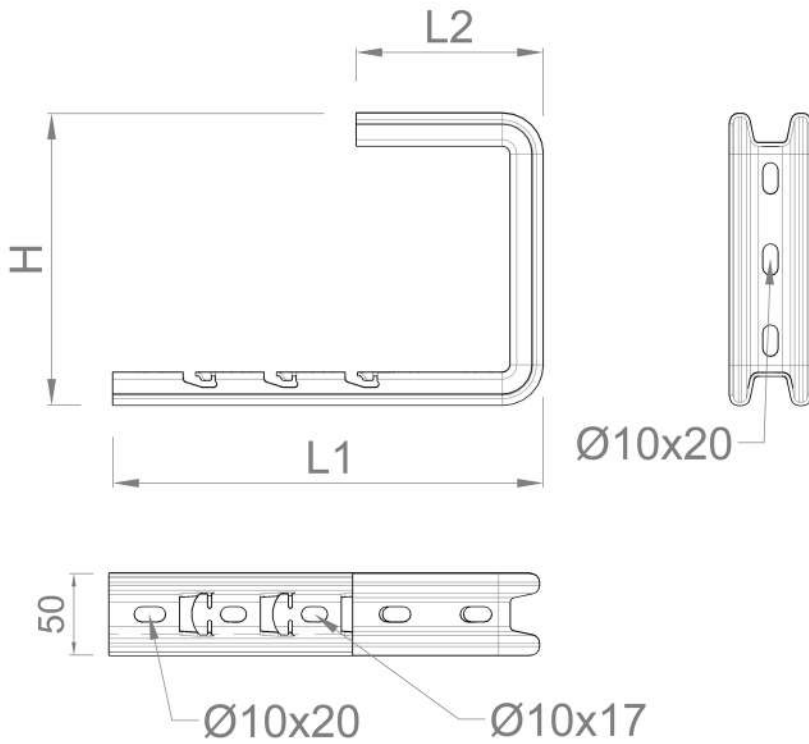

Ref. Code	H (mm)	L1 (mm)	L2 (mm)	Thickness (mm)	Weight (Kg/unit)
SOPC10SG	180	215	115	2	0.517
SOPC15SG	180	265	115	2	0.550
SOPC20SG	180	315	115	2	0.623
SOPC30SG	180	415	115	2	0.714

Suffix Code

Description of Coating / Material

- SG** Sendzimir Galvanized, also called Pre-Galvanized.
Corrosion Resistance: Classified 3 according to IEC 61537.
- IN** Austenitic Stainless Steel AISI 304 or AISI 316L.
Corrosion Resistance: Classified 9D according to IEC 61537.

* Ask us for other available coatings

