
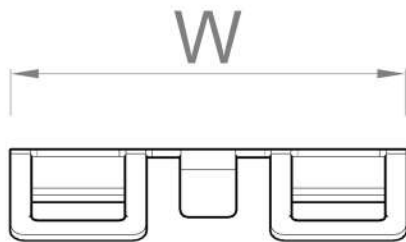


Fast fitting HS

Description: Quick connection to fix the sides of two cable trays in curves, angles, reductions, and T-joints.

The element is fixed to the cable tray by housing the lower side wire in the lower bend of the accessory and surrounding the upper side wire with the upper lashes.

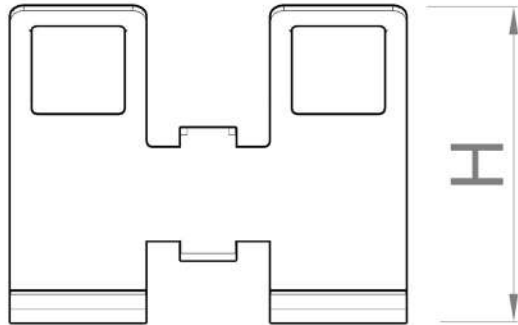

Ref. Code	H (mm)	W (mm)	Thickness (mm)	Weight (Kg/unit)
URSG	50	60	0,8	0,01

Suffix Code

Description of Coating / Material

SG	Sendzimir Galvanized, also called Pre-Galvanized. Corrosion Resistance: <u>Classified 3</u> according to IEC 61537.
IN	Austenitic Stainless Steel AISI 304 or AISI 316L. Corrosion Resistance: <u>Classified 9D</u> according to IEC 61537.

