


Clic omega support straight SOAL 1-3

Description: Long omega type support. Available in 3 lengths: 1, 2 and 3 meters. It allows multiple installation options and combinations in a quick and easy way.

Wall installation: Once fixed to the wall using screws, this bracket allows several EASYCONNECT® cable trays of different widths to be installed on the same plane and at different heights.

Ceiling installation: Fixed to ceiling using threaded rods (ref. VR & TVR), it allows to install several EASYCONNECT® cable trays of different widths, depending on the anchoring points and the desired distance between trays.

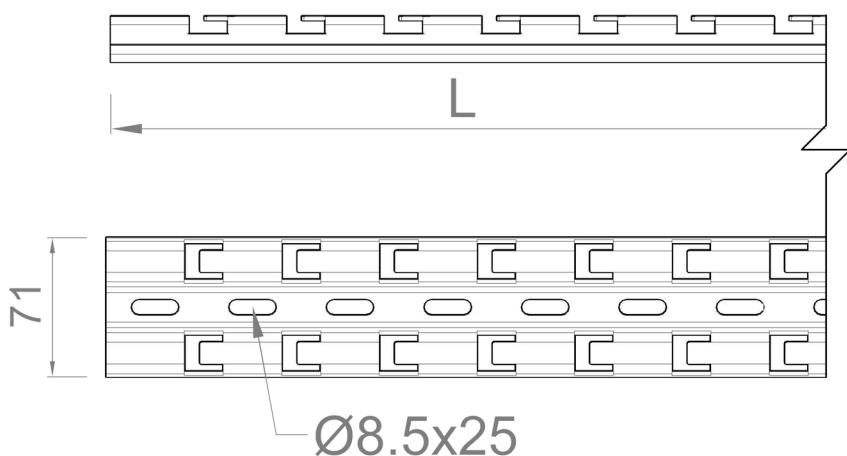

Ref. Code	L (mm)	Thickness (mm)	Weight (Kg/unit)
SOAL1SG	1000	2	1,513
SOAL2SG	2000	2	3,027
SOAL3SG	2990	2	4,540

NOTE: This product is not suitable for cable trays EC30.060; EC60.060; EC60.060-6W - nor any of its coating types.

Suffix Code	Description of Coating / Material
SG	Senzimir Galvanized, also called Pre-Galvanized. Corrosion Resistance: <u>Classified 3</u> according to IEC 61537.
IN	Austenitic Stainless Steel AISI 304 or AISI 316L. Corrosion Resistance: <u>Classified 9D</u> according to IEC 61537.

